
DYNAPRO®

DYNApro Audio Co. LTD (REG:13925014000121691)

کابل میکروفن استاندارد با شیلد مارپیچ

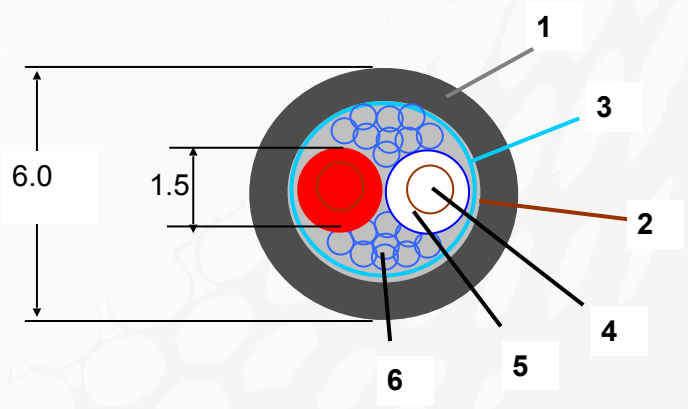

شرح:
۱– غلاف
۲– شیلد مارپیچ
۳– فویل آلومینیمی
۴– مغزی
۵– غلاف مغزی
۶ فیلتر

مشخصات مکانیکی		
Conductor area		0,495mm^2
Composition of conductor		28 x 0,15mm, bare annealed copper, OFC
Conductor insulation		LD -PE Ø 1.5 ±0.1mm
Conductor colour		Red and White
Composition of cores		2 twisted cores, 60 MM one turn, left hand
Filler		Cotton Strand
Foil shield		AL / PT Foil, Coverage 100% Conductive side (AL coated) towards spiral shield, spiral wound.
Shield		Spiral Shield, 80 x 0.1mm Bare annealed copper, OFC
Jacket material		Phthalate free PVC with restricted substance: Cadmium: < 5 PPM ('Cadmium free') Lead: < 50 PPM Mercury: < 2 PPM Chromium: Not contained **Hardness: 65 Shore-A**
Jacket colour		According Customer request
Jacket surface, characteristic & appearance		not shiny, not sticky moderate smell.
Overall diameter		Ø 6.8 mm, tolerance:+/- 0,2mm
Flexibility, Mechanical Characteristic		According approved Samples
Working temperature	Mobile	-5°C to +70°C
	Fixed	-20° to +70°C
Cable Printing		According Customer request

DYNAPRO®

DYNApro Audio Co. LTD (REG:13925014000121691)





مشخصات الکتریکی		شرایط
Conductor DC resistance	≤ 78 mOhm/m	20° C
Screen DC resistance	≤ 30 mOhm/m	20° C
Insulation resistance	> 1GOhm/Km	20°C, 500 V_{DC}
Capacitance conductor/conductor	≤ 75 pF/m	1 KHz
Capacitance: conductor/screen	≤ 135 pF/m	1 KHz
Test voltage: conductor/conductor	500 V eff	50 Hz, 1 Minute
Test voltage: conductor/screen	1000 V eff	50 Hz, 1 Minute



